


Flat light-chain cable H05RNH2-F acc. to VDE 0282-8



conductor material:	bare copper
conductor construction:	fine stranded, class 5
insulation:	rubber (EPR) EI4
maximum temperature at conductor:	60 °C
sheathing material:	rubber (CR) EM2
flame retardant:	VDE 0482-332-1-2/IEC 60332-1
max. operating temperature, fixed:	-25 - 60 °C
version:	flat
core identification:	colours acc. VDE 0293 (HD308)
nominal voltage U₀:	300 V
nominal voltage U:	500 V

Application: Cable for dry and wet rooms as well as outdoor for temporary installation of fairy lights.

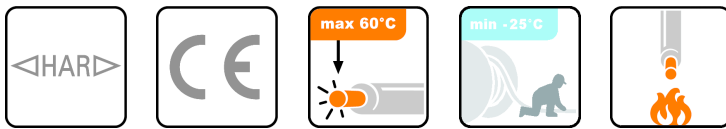

The products and information presented here are for technical calculation only. They are subject to technical progress and in no way represent the ability of shipment. Outer diameters are approximately.

table: technical data H05RNH2-F

Art.-Nr.	part-name	RI [Ω/km]	B [mm]	H [mm]	CU	G [kg/km]
050411	H05RNH2-F 02X1,5 GN Illuminationsleitung	13,3	14	6	28,8	145
051078	H05RNH2-F 02X2,5 GN Illuminationsleitung	7,98	14,5	6,5	48	195

4

www.faberkabel.de