


NHXCH-FE 180/E 30 security cable, halogen-free, 0,6/1 kV, with improved fire characteristics

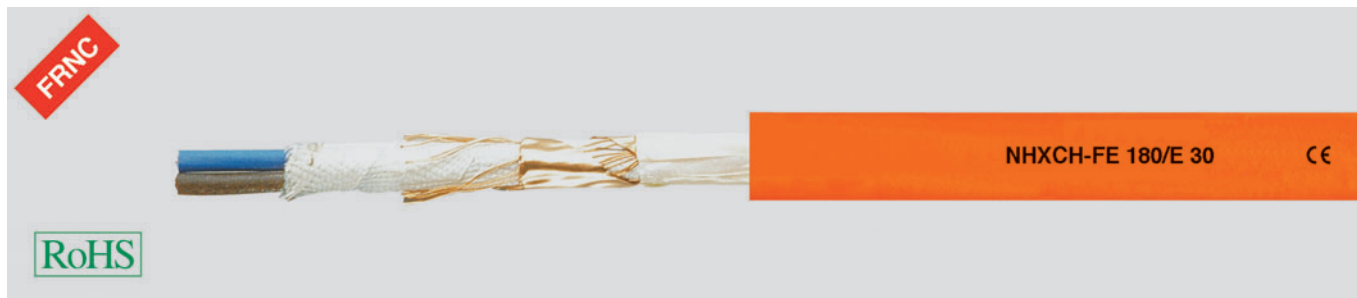

Technical data

- Halogen-free security cable with improved characteristics in the case of fire to DIN VDE 0266
- **Insulation integrity**
180 minutes to DIN VDE 0472 part 814
- **Functionality**
30 minutes to DIN VDE 4102 part 12
- Permissible **operating temperature**
at conductor +90 °C
- **Nominal voltage** U_0/U 0,6/1 kV
- **Test voltage** 4000 V
- **Minimum bending radius**
approx. 15xcable ø
- **Radiation resistance**
up to 200x10⁶ cJ/kg (up to 200 Mrad)
- **Caloric load values**
see Technical Informations

Cable structure

- Bare copper conductor, solid or stranded, to DIN VDE 0295 cl. 1 or cl. 2, BS 6360 cl. 1 or 2, IEC 60228 cl. 1 or cl. 2, HD 383
- Special core insulation of mica tape and cross-linked polymer HI1 to DIN VDE 0207 part 23
- Colour coding of cores according to DIN VDE 0293-308
- Core stranded in layer
- Core wrapping with glass-fibre tape
- Copper wire screening with helix of copper tape
- Separator of special tape
- Outer jacket orange, polymer-compound HM4, to DIN VDE 0207 part 24, flame retardant

Tests

- Flame test to VDE 0482 part 266-2, BS 4066 part 3/ DIN EN 50266-2/ IEC 60332-3 (equivalent DIN VDE 0472 part 804 test method C)
- Corrosiveness of combustion gases according to VDE 0482 part 267/ DIN EN 50267-2-2/ IEC 60754-2 (equivalent DIN VDE 0472 part 813)
- Halogen-free according to VDE 0482 part 267/ DIN EN 50267-2-1/ IEC 60754-1 (equivalent DIN VDE 0472 part 815)
- Smoke density according to VDE 0482 part 1034-1+2 / IEC 61034-1+2 / DIN EN 61034-1+2 / BS 7622 part 1+2 (equivalent DIN VDE 0472 part 816)
- Insulation integrity under flame propagation to VDE 0472 part 814 Å IEC 60331
- Burning behaviour in fire (functionality) of the complete cable system to DIN 4102 part 12 (30 minutes)
- **LSOH** = Low Smoke Zero Halogen-free.

Properties

- Halogen-free; no evolution of corrosive and toxic gases
 - Flame retardant and hardly flammable
 - Self-extinguished and fire resistant
 - No flame propagation, therefore security from fire
 - Low smoke density, no darkening
 - Toxicological harmless
 - No self-ignition
 - Maintenance of functionality during the increased current load
 - **FE 180: Insulation integrity** for 180 minutes. Tests to DIN VDE 0472 part 814 Å IEC 60331.
 - **Insulation integrity** under direct flame propagation for the test period of 180 minutes.
 - **E 30: Functionality** of electrical cable systems for minimum 30 minutes. Test method to DIN 4102 part 12. This fulfils the demands of technical guide lines for fire protection (supplement 1 to DIN VDE 0108 part 1).
- The **functionality** for 30 minutes assures when persons and animals are to be saved from a burning building. 30 minutes secures the functional performance of the fire warning and alarm systems, safety and spare lighting, passenger lifts with evacuation circuits, except the cables which are installed within the ladder shafts and engine rooms.

Note

- re = round solid core;
rm = stranded core.

Application

Everywhere, where in case of fire human life and material assets are to be protected and safety consciousness take a special significance, e.g. in industrial complexes, power stations, communal establishment, hotels, airports, underground railway networks, hospitals and outpatients clinic (DIN VDE 0107), department stores, data processing centres, theaters, cinemas, in multi-storey buildings, public gatherings, schools etc. (DIN VDE 0108), mining works, offshore plants, leading centres, traffic communication, emergency power supply and alarm systems. Suitable for fixed installation in dry and moist rooms, in, above, on and beneath plaster as well as in masonry walls and in concrete. These cables are suitable for outdoor applications and in underground by using in conduits or tubes. Additionally valid also DIN VDE 0298 part 1 and 2. For the installation in conduit all precautions must be taken that no accumulation of water can occur in the pipes.

CE = The product is conformed with the EC Low-Voltage Directive 2006/95/EG.

Part no.	No. cores x cross-sec. mm²	Outer Ø approx. mm	Cop. weight kg / km	Weight approx. kg / km	AWG-No.
52900	2 x 1,5 / 1,5 re	15,0	52,0	220,0	16
52901	2 x 2,5 / 2,5 re	13,5	80,0	385,0	14
52902	2 x 4 / 4 re	14,5	123,0	470,0	10
52903	2 x 6 / 6 re	16,0	182,0	550,0	10
52904	2 x 10 / 10 re	18,0	312,0	730,0	8
52905	3 x 1,5 / 1,5 re	13,5	66,0	380,0	16
52906	3 x 2,5 / 2,5 re	14,5	104,0	430,0	14

Part no.	No. cores x cross-sec. mm²	Outer Ø approx. mm	Cop. weight kg / km	Weight approx. kg / km	AWG-No.
52907	3 x 4 / 4 re	15,5	161,0	530,0	12
52908	3 x 6 / 6 re	16,5	240,0	630,0	10
52909	3 x 10 / 10 re	18,5	408,0	850,0	8
52910	3 x 16 / 16 rm	20,5	643,0	1150,0	6
52911	3 x 25 / 16 rm	24,0	902,0	1700,0	4
52912	3 x 35 / 16 rm	26,5	1190,0	2150,0	2
52913	3 x 50 / 25 rm	29,5	1723,0	2800,0	1

Continuation ►

NHXCH-FE 180/E 30 security cable, halogen-free, 0,6/1 kV, with improved fire characteristics




Part no.	No. cores x cross-sec. mm²	Outer Ø approx. mm	Cop. weight kg / km	Weight approx. kg / km	AWG-No.
52914	3 x 70 / 35 rm	33,0	2410,0	3800,0	2/0
52915	3 x 95 / 50 rm	37,5	3296,0	5100,0	3/0
52916	3 x 120 / 70 rm	42,5	4236,0	6250,0	4/0
52917	3 x 150 / 70 rm	47,0	5100,0	6900,0	300 kcmil
52918	3 x 185 / 95 rm	52,5	6383,0	8550,0	350 kcmil
52919	3 x 240 / 120 rm	58,5	8242,0	11150,0	500 kcmil
52920	4 x 1,5 / 1,5 re	14,5	81,0	435,0	16
52921	4 x 2,5 / 2,5 re	15,5	128,0	500,0	14
52922	4 x 4 / 4 re	16,5	200,0	610,0	12
52923	4 x 6 / 6 re	17,5	297,0	740,0	10
52924	4 x 10 / 10 re	20,0	504,0	1050,0	8
52925	4 x 16 / 16 re	22,0	796,0	1350,0	6
52926	4 x 25 / 16 rm	26,0	1142,0	1950,0	4
52927	4 x 35 / 16 rm	28,5	1526,0	2400,0	2
52928	4 x 50 / 25 rm	32,0	2203,0	3200,0	1
52929	4 x 70 / 35 rm	37,0	3082,0	4300,0	2/0

Part no.	No. cores x cross-sec. mm²	Outer Ø approx. mm	Cop. weight kg / km	Weight approx. kg / km	AWG-No.
52930	4 x 95 / 50 rm	41,5	4208,0	5750,0	3/0
52931	4 x 120 / 70 rm	47,0	5388,0	7100,0	4/0
52932	4 x 150 / 70 rm	52,0	6558,0	8550,0	300 kcmil
52933	4 x 185 / 95 rm	58,0	8159,0	10700,0	350 kcmil
52934	4 x 240 / 120 rm	64,0	10546,0	13930,0	500 kcmil
52935	7 x 1,5 / 2,5 re	16,5	133,0	635,0	16
52936	7 x 2,5 / 2,5 re	17,5	200,0	680,0	14
52937	10 x 1,5 / 2,5 re	19,5	176,0	870,0	16
52938	10 x 2,5 / 4 re	21,0	286,0	980,0	14
52939	12 x 1,5 / 2,5 re	20,0	205,0	1050,0	16
52940	12 x 2,5 / 4 re	21,5	334,0	1050,0	14
52941	24 x 1,5 / 6 re	26,0	413,0	1900,0	16
52942	24 x 2,5 / 10 re	28,5	696,0	1900,0	14
52943	30 x 1,5 / 6 re	27,0	499,0	2200,0	16
52944	30 x 2,5 / 10 re	30,0	840,0	2200,0	14

Dimensions and specifications may be changed without prior notice. (RQ02)

Insulating, shrinking, braided and temperature protection tubes

Braided hoses
High temperature protection
Insulation tubes
Heat-shrink tubes
End caps

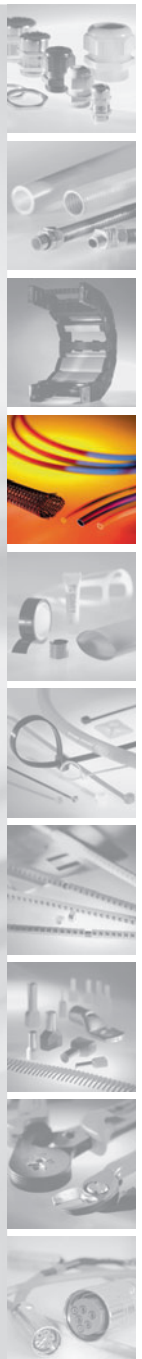

You can find insulating, shrinking, braided and temperature protection tubes in our catalogue Cable Accessories.
Request it now at www.helukabel.de