


N2XSY 6/10kV, 12/20kV, 18/30kV XLPE-insulated, Cu-conductor, single core, screened, PVC-jacket

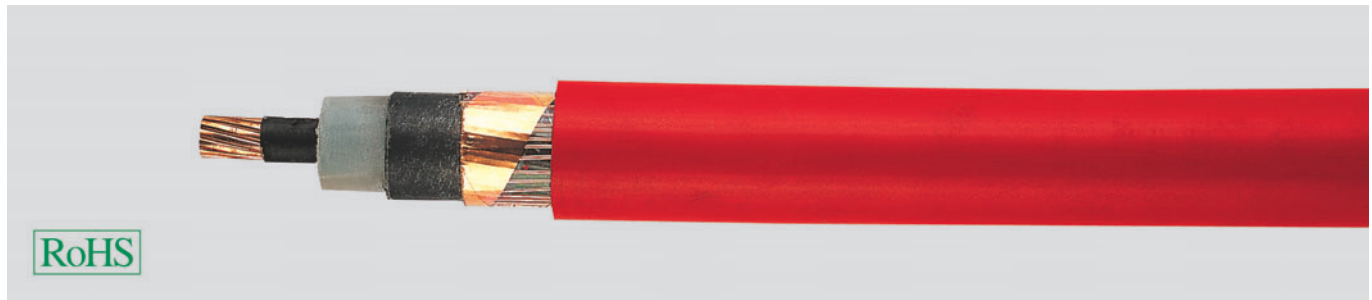

Technical data

- XLPE-insulated power cables to DIN VDE 0276 part 620, HD 620 S1 and IEC 60502
- **Temperature range**
during installation up to -5 °C
- **Operating temperature**
max. 90 °C
- **Short circuit temperature**
250 °C (short circuit duration up to 5 sec.)
- **Nominal voltages**
U₀/U 6/10 kV, 12/20 kV, 18/30 kV
- **Operating voltages** for
6/10 kV = max. 12 kV
12/20 kV = max. 24 kV
18/30 kV = max. 36 kV
- **Test voltages** for
6/10 kV = 15 kV
12/20 kV = 30 kV
18/30 kV = 45 kV
- **Minimum bending radius**
during installation max. 15x cable ø
- **Power ratings table**
see Technical Informations

Cable structure

- Circular bare Cu-conductor of stranded wires to HD 383
- Inner semi-conducting coating
- Core insulation of cross-linked Polyethylene (XLPE), PE-compound DIX8 to HD 620.1
- Outer extrusion of semi-conducting coating spliced with the insulation
- Wrapping of conductive material
- Screen: Braiding of copper wires with one or two tape(s) applied helically
- Wrapping
- PVC outer jacket, compound DMV6 to HD 620.1
- Jacket colour red

Properties

- PVC self-extinguishing and flame retardant according to VDE 0482-332-1-2, DIN EN 60332-1-2/ IEC 60332-1 (equivalent DIN VDE 0472 part 804 test method B)
- The materials used in manufacture are cadmium-free and contain no silicone and free from substances harmful to the wetting properties of lacquers
- **Installation notes**
To guarantee an optimum on operating reliability the extruded semi-conductive layer is spliced with the insulation for long duration. For this reason we recommend a peeling tool for installation.

Note

- Further dimensions available on request.

Application

Suitable for installation mostly for power supply stations, in indoors and in cable ducts, outdoors, underground and in water as well as for installation on cable trays for industries, switch-boards and power stations. Due to the good laying characteristic, this can also be laid easily in difficult line guideways.

The inner conducting layer between the conductor and the XLPE insulation and the firmly bonded outer conducting layer on the XLPE insulation assures a construction free of partial discharges with high operational reliability.

Part no.	No. cores x cross-sec. mm ²	Operation voltage max.	Nominal voltage kV	Insulation thickness mm	Jacket thickness mm Nominal value	Outer Ø min. - max. mm	Cop. weight kg / km	Weight approx. kg / km	AWG-No.
32400	1 x 35 rm / 16	12	6 / 10	3,4	2,5	23,0 - 28,0	518,0	905,0	2
32401	1 x 50 rm / 16	12	6 / 10	3,4	2,5	24,0 - 29,0	662,0	1080,0	1
32402	1 x 70 rm / 16	12	6 / 10	3,4	2,5	26,0 - 31,0	854,0	1310,0	2/0
32403	1 x 95 rm / 16	12	6 / 10	3,4	2,5	26,0 - 32,0	1094,0	1580,0	3/0
32404	1 x 120 rm / 16	12	6 / 10	3,4	2,5	28,0 - 34,0	1334,0	1860,0	4/0
32406	1 x 150 rm / 25	12	6 / 10	3,4	2,5	29,0 - 35,0	1723,0	2210,0	300 kcmil
32405	1 x 150 rm / 16	12	6 / 10	3,4	2,5	29,0 - 35,0	1622,0	2040,0	300 kcmil
32408	1 x 185 rm / 25	12	6 / 10	3,4	2,5	31,0 - 37,0	2059,0	2580,0	350 kcmil
32407	1 x 185 rm / 16	12	6 / 10	3,4	2,5	31,0 - 37,0	1958,0	2450,0	350 kcmil
32409	1 x 240 rm / 16	12	6 / 10	3,4	2,5	33,0 - 39,0	2486,0	3000,0	500 kcmil
32410	1 x 240 rm / 25	12	6 / 10	3,4	2,5	33,0 - 39,0	2587,0	3130,0	500 kcmil
32411	1 x 300 rm / 25	12	6 / 10	3,4	2,5	36,0 - 41,0	3163,0	3780,0	600 kcmil
32412	1 x 400 rm / 35	12	6 / 10	3,4	2,5	40,0 - 45,0	4234,0	4670,0	750 kcmil
32413	1 x 500 rm / 35	12	6 / 10	3,4	2,5	43,0 - 48,0	5194,0	5750,0	1000 kcmil
32414	1 x 35 rm / 16	24	12 / 20	5,5	2,5	27,0 - 32,0	518,0	1110,0	2
32415	1 x 50 rm / 16	24	12 / 20	5,5	2,5	28,0 - 33,0	662,0	1250,0	1
32416	1 x 70 rm / 16	24	12 / 20	5,5	2,5	30,0 - 35,0	854,0	1510,0	2/0
32417	1 x 95 rm / 16	24	12 / 20	5,5	2,5	31,0 - 36,0	1094,0	1780,0	3/0
32418	1 x 120 rm / 16	24	12 / 20	5,5	2,5	32,0 - 38,0	1334,0	2070,0	4/0
32419	1 x 150 rm / 16	24	12 / 20	5,5	2,5	33,0 - 39,0	1622,0	2310,0	300 kcmil
32420	1 x 150 rm / 25	24	12 / 20	5,5	2,5	33,0 - 39,0	1723,0	2420,0	300 kcmil
32422	1 x 185 rm / 25	24	12 / 20	5,5	2,5	35,0 - 41,0	2059,0	2810,0	350 kcmil
32421	1 x 185 rm / 16	24	12 / 20	5,5	2,5	35,0 - 41,0	1958,0	2650,0	350 kcmil
32424	1 x 240 rm / 25	24	12 / 20	5,5	2,5	38,0 - 44,0	2587,0	3360,0	500 kcmil
32423	1 x 240 rm / 16	24	12 / 20	5,5	2,5	38,0 - 44,0	2486,0	3260,0	500 kcmil
32425	1 x 300 rm / 25	24	12 / 20	5,5	2,5	40,0 - 46,0	3163,0	4020,0	600 kcmil
32426	1 x 400 rm / 35	24	12 / 20	5,5	2,5	43,0 - 49,0	4234,0	4930,0	750 kcmil
32427	1 x 500 rm / 35	24	12 / 20	5,5	2,5	46,0 - 52,0	5194,0	6050,0	1000 kcmil
32428	1 x 50 rm / 16	36	18 / 30	8	2,5	32,0 - 38,0	662,0	1480,0	1
32429	1 x 70 rm / 16	36	18 / 30	8	2,5	34,0 - 40,0	854,0	1730,0	2/0

Continuation ►

N2XSY 6/10kV, 12/20kV, 18/30kV XLPE-insulated, Cu-conductor, single core, screened, PVC-jacket



Part no.	No. cores x cross-sec. mm ²	Operation voltage max.	Nominal voltage kV	Insulation thickness mm	Jacket thickness Nominal value mm	Outer Ø min. - max. mm	Cop. weight kg / km	Weight approx. kg / km	AWG-No.
32430	1 x 95 rm / 16	36	18 / 30	8	2,5	35,0 - 41,0	1094,0	2060,0	3/0
32431	1 x 120 rm / 16	36	18 / 30	8	2,5	37,0 - 43,0	1334,0	2330,0	4/0
32432	1 x 150 rm / 25	36	18 / 30	8	2,5	38,0 - 44,0	1723,0	2720,0	300 kcmil
32433	1 x 185 rm / 25	36	18 / 30	8	2,5	40,0 - 46,0	2059,0	3100,0	350 kcmil
32434	1 x 240 rm / 25	36	18 / 30	8	2,5	42,0 - 48,0	2587,0	3730,0	500 kcmil
32435	1 x 300 rm / 25	36	18 / 30	8	2,5	45,0 - 51,0	3163,0	4000,0	600 kcmil
32436	1 x 400 rm / 35	36	18 / 30	8	2,5	48,0 - 54,0	4234,0	5330,0	750 kcmil
32437	1 x 500 rm / 35	36	18 / 30	8	2,5	51,0 - 57,0	5194,0	6480,0	1000 kcmil

Dimensions and specifications may be changed without prior notice. (RQ03)

Core end sleeves and cable lugs

Core end sleeves
Solderless terminals
Tubular cable lugs
Compression joints



You can find core end sleeves and cable lugs in our catalogue Cable Accessories.
Request it now at www.helukabel.de