




Cable structure

Inner conductor diameter:	0,58 mm
Conductor material:	Copper, bare
Core insulation:	PO
Core colours:	wh/bu, wh/og, wh/gn, wh/bn
Shielding 1	-
Screen over stranding element:	Polyester foil, aluminium-lined
Screen 1 over stranding:	Cu braid
Screen 2 over stranding:	-
Inner sheath material:	PVC
Outer sheath material:	PVC
Outer Ø	approx. 11,8 mm
Outer sheath colour:	Black similar to RAL 9005

S-STP 4x2xAWG 23/1 PVC/PVC

Electrical data

Characteristic impedance:	100 Ohm ± 15 ohm at 1 to 100 MHz 100 Ohm ± 20 ohm at 101 to 600 MHz
Loop resistance:	160 Ohm/km max.
Mutual capacitance:	43,0 nF/km nom.
Rel. propagation velocity:	79 %

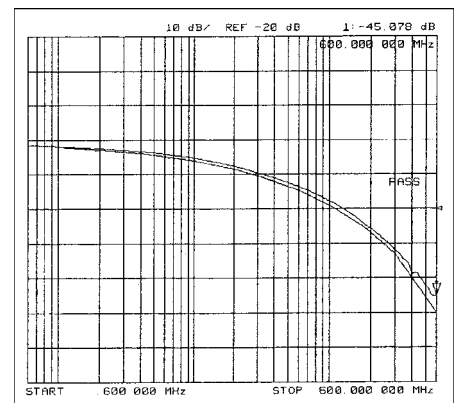

Typical values


Frequency (MHz)	10	16	62,5	100	200	300	600
Attenuation (dB/100m)	5,8	7,4	14,6	18,4	26,2	32,1	49,0
Next (db)	85,0	85,0	85,0	85,0	83,0	80,0	80,0
ACR (db)	79,2	77,6	70,4	66,6	56,8	47,9	31,0

Technical data

Weight:	153,00 kg/km
Min. bending radius for laying:	95 mm
Operating temperature range min.:	-30°C
Operating temperature range max.:	+70°C
Caloric load, approx. value:	2,62 MJ/m
Copper weight:	34,00 kg/km

Norms

Acc. to ISO/IEC 11801, Acc. to EN 50173, Acc. to EIA/TIA 568-A, Category 7, Flame-retardant acc. to IEC 60332-1, Smoke density acc. to IEC 61034

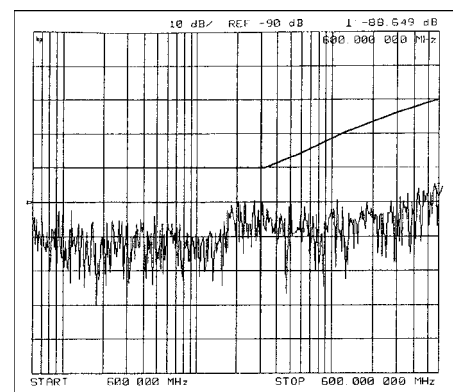

Application

HELUKAT® 600 data cables are used in the tertiary, but also in the secondary level of a network. They are characterized by large performance reserves and outstanding performance. They can be used to implement services such as Gigabit Ethernet, Fast Ethernet, Ethernet, ATM155, FDDI, token ring 4/16 Mbit/s or ISDN absolutely trouble-free. The serie of HELUKAT® 600A with a double PVC jacket is constructed especially for outdoor applications like laying at house walls or in cable lines.

Part no.

801147, S-STP 4x2xAWG 23/1 PVC/PVC

Dimensions and specifications may be changed without prior notice.