


N2XS(F)2Y 6/10kV, 12/20kV, 18/30kV XLPE-insulated, Cu-conductor, single core, longitudinally water-tight, screened, PE-jacket

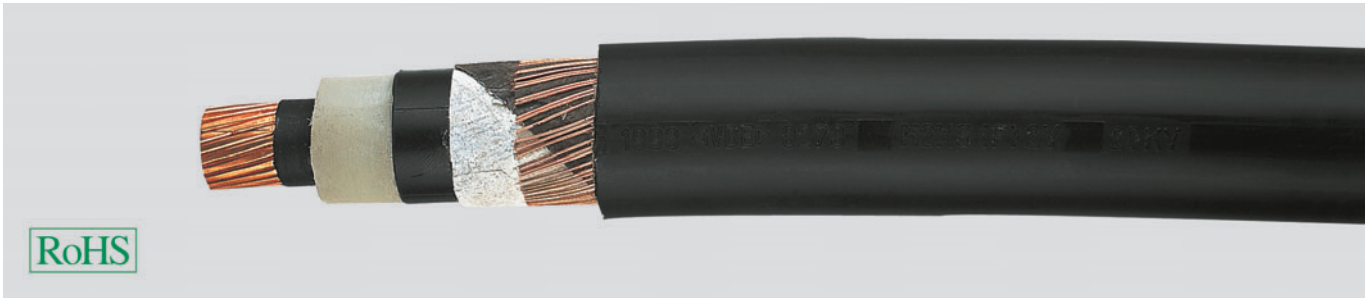

Technical data

- XLPE-insulated power cables to DIN VDE 0276 part 620, HD 620 S1 and IEC 60502
- **Temperature range** during installation up to -20 °C
- **Operating temperature** max. 90 °C
- **Short circuit temperature** 250 °C (short circuit duration up to 5 sec.)
- **Nominal voltages** U₀/U 6/10 kV, 12/20 kV, 18/30 kV
- **Operating voltages** for 6/10 kV = max. 12 kV
12/20 kV = max. 24 kV
18/30 kV = max. 36 kV
- **Test voltages** for 6/10 kV = 15 kV
12/20 kV = 30 kV
18/30 kV = 45 kV
- **Minimum bending radius** during installation max. 15x cable ø
- **Power ratings** table see Technical Informations

Cable structure

- Circular bare Cu-conductor of stranded wires to DIN VDE 0295 cl. 2 bzw. IEC 60228 cl. 2
- Inner semi-conducting coating
- Core insulation of cross-linked Polyethylene (XLPE), PE-compound DIX8 to HD 620.1
- Outer extrusion of semi-conducting coating spliced with the XLPE-insulation
- Longitudinally water-tight, conductive wrapping
- Screen: Braiding of copper wires with one or two tapes applied helically
- Longitudinally water-tight wrapping
- PE-outer jacket, compound DMP2 to HD 620.1
- Jacket colour black

Properties

- The materials used in manufacture are cadmium-free and contain no silicone and free from substances harmful to the wetting properties of lacquers
- **Installation notes** To guarantee an optimum on operating reliability the extruded semi-conductive layer is spliced with the insulation for long duration. For this reason we recommend a peeling tool for installation

Note

- AWG sizes are approximate equivalent values. The actual cross-section is in mm².
- For longitudinally and crosswise water-tight cable type N2XS(FL)2Y with PE-copolymere coated aluminium.
- Further types and dimensions on request.

Application

Suitable for indoor installation and in cable ducts, outdoors, underground and in water as well as for installation on cable trays for industries, switch-boards and power stations. The PE-outer jacket is resistant to high mechanical stress for laying the cables. This PE-jacket is not flame-resistant (does not conform the test method B, as per VDE 0472 part 804).

The inner conducting layer between the conductor and the XLPE insulation and the firmly bonded outer conducting layer on the XLPE insulation assures a construction free of partial discharges with high operational reliability.

Part no.	No. cores x cross-sec. mm ²	Operation voltage max.	Nominal voltage kV	Insulation thickness mm	Screen cross-sec. mm ²	Jacket thickness Nominal value mm	Outer Ø approx. mm	Cop. weight kg / km	Weight approx. kg / km	AWG-No.
32560	1 x 35 rm / 16	12	6 / 10	3,4	16	2,5	26,0	518,0	1050,0	2
32561	1 x 50 rm / 16	12	6 / 10	3,4	16	2,5	28,0	662,0	1150,0	1
32562	1 x 70 rm / 16	12	6 / 10	3,4	16	2,5	30,0	854,0	1460,0	2/0
32563	1 x 95 rm / 16	12	6 / 10	3,4	16	2,5	31,0	1094,0	1700,0	3/0
32564	1 x 120 rm / 16	12	6 / 10	3,4	16	2,5	32,0	1334,0	2030,0	4/0
32565	1 x 150 rm / 25	12	6 / 10	3,4	25	2,5	34,0	1723,0	2350,0	300 kcmil
32566	1 x 185 rm / 25	12	6 / 10	3,4	25	2,5	36,0	2059,0	2700,0	350 kcmil
32567	1 x 240 rm / 25	12	6 / 10	3,4	25	2,5	38,0	2587,0	3300,0	500 kcmil
32568	1 x 300 rm / 25	12	6 / 10	3,4	25	2,5	40,0	3163,0	3900,0	600 kcmil
32569	1 x 400 rm / 35	12	6 / 10	3,4	35	2,5	44,0	4234,0	4850,0	750 kcmil
32570	1 x 500 rm / 35	12	6 / 10	3,4	35	2,5	47,0	5194,0	6000,0	1000 kcmil
32571	1 x 35 rm / 16	24	12 / 20	5,5	16	2,5	31,0	518,0	1210,0	2
32572	1 x 50 rm / 16	24	12 / 20	5,5	16	2,5	33,0	662,0	1400,0	1
32573	1 x 70 rm / 16	24	12 / 20	5,5	16	2,5	34,0	854,0	1550,0	2/0
32574	1 x 95 rm / 16	24	12 / 20	5,5	16	2,5	36,0	1094,0	1800,0	3/0
32575	1 x 120 rm / 16	24	12 / 20	5,5	16	2,5	37,0	1334,0	2150,0	4/0
32576	1 x 150 rm / 25	24	12 / 20	5,5	25	2,5	39,0	1723,0	2400,0	300 kcmil
32577	1 x 185 rm / 25	24	12 / 20	5,5	25	2,5	41,0	2059,0	2850,0	350 kcmil
32578	1 x 240 rm / 25	24	12 / 20	5,5	25	2,5	43,0	2587,0	3250,0	500 kcmil
32579	1 x 300 rm / 25	24	12 / 20	5,5	25	2,5	45,0	3163,0	3850,0	600 kcmil
32580	1 x 400 rm / 35	24	12 / 20	5,5	35	2,5	48,0	4234,0	4900,0	750 kcmil
32581	1 x 500 rm / 35	24	12 / 20	5,5	35	2,5	52,0	5194,0	6100,0	1000 kcmil
32582	1 x 50 rm / 16	36	18 / 30	8	16	2,5	37,0	662,0	1700,0	1
32583	1 x 70 rm / 16	36	18 / 30	8	16	2,5	38,0	854,0	1950,0	2/0

Continuation ▶

N2XS(F)2Y 6/10kV, 12/20kV, 18/30kV XLPE-insulated, Cu-conductor, single core, longitudinally water-tight, screened, PE-jacket



Part no.	No. cores x cross-sec. mm ²	Operation voltage max.	Nominal voltage kV	Insulation thickness mm	Screen cross-sec. mm ²	Jacket thickness Nominal value mm	Outer Ø approx. mm	Cop. weight kg / km	Weight approx. kg / km	AWG-No.
32584	1 x 95 rm / 16	36	18 / 30	8	16	2,5	40,0	1094,0	2300,0	3/0
32585	1 x 120 rm / 16	36	18 / 30	8	16	2,5	42,0	1334,0	2600,0	4/0
32586	1 x 150 rm / 25	36	18 / 30	8	25	2,5	43,0	1723,0	3000,0	300 kcmil
32587	1 x 185 rm / 25	36	18 / 30	8	25	2,5	45,0	2059,0	3350,0	350 kcmil
32588	1 x 240 rm / 25	36	18 / 30	8	25	2,5	47,0	2587,0	4100,0	500 kcmil
32589	1 x 300 rm / 25	36	18 / 30	8	25	2,5	50,0	3163,0	4800,0	600 kcmil
32590	1 x 400 rm / 35	36	18 / 30	8	35	2,5	53,0	4234,0	5750,0	750 kcmil
32591	1 x 500 rm / 35	36	18 / 30	8	35	2,5	56,0	5194,0	6700,0	1000 kcmil

Dimensions and specifications may be changed without prior notice. (RQ03)

Conduits

Corrugated tubes


- for standard applications
- for larger sizes
- scissile corrugated tubes
- conduit glands

High flexible conduits

- plastic conduits with spiral spring
- metal conduits
- conduits glands

Conduit for heavy mechanical duty

- metal conduits with plastic sheat
- plastic conduits
- conduits glands for metal conduits



You can find conduits in our catalogue Cable Accessories.
Request it now at www.helukabel.de